

0.552in [14.0mm]  
MAX INTONATION

0.292in [7.4mm]  
MIN INTONATION

0.708in [18.0mm] ± .062in [1.5mm]  
STRING SPACING

0.630in [16.0mm]  
MAX STRING HEIGHT

0.400in [10.2mm]  
MIN STRING HEIGHT

WEIGHT (WITH MOUNTING HARDWARE): 9.2oz [260g]

4.391in [111.5mm]

3.625in [92.1mm]

0.718in [18.2mm]

1.174in [29.8mm]

1.440in [36.6mm]

NUT

0.200in [5.1mm]

ADJUST W/  
5/16 in  
OPEN WRENCH

Ø 0.500in [12.7mm]

0.500in [12.7mm]

ADJUST W/  
1/8 in HEX WRENCH

STUD

0.080in [2.0mm]

5/16-24 in  
THREAD

INSERT

1.000in [25.4mm]

0.800in [20.3mm]

USE 7/16in [11mm] BORE

THIS DRAWING IS THE SOLE PROPERTY OF HIPSHOT PRODUCTS, INC. ALL RIGHTS ARE RESERVED. DIMENSIONS AND PRODUCT FEATURES MAY CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCE: ± .005

REV DATE: 6/10/2020

5D400-708 4 STG D STYLE - 708





8248 STATE ROUTE 96

Interlaken, NY 14847 U.S.A.

TEL: 607-532-9404 FAX: 607-532-9530


E-MAIL: info@HipshotProducts.com

Scale

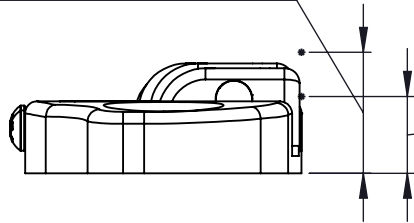


A

2

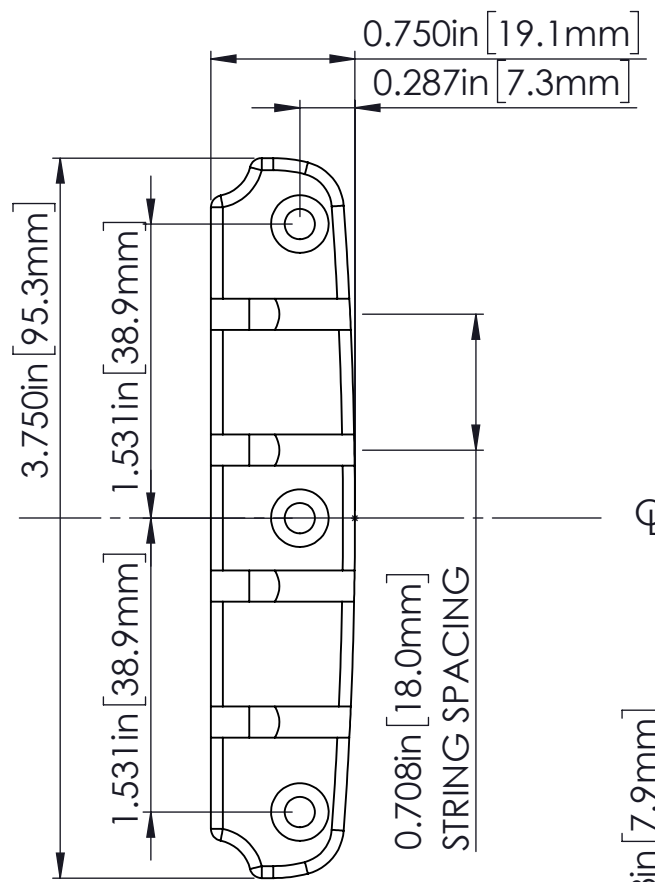


STRING BALL RELIEF



0.500in [12.7mm]

0.188in [4.8mm]

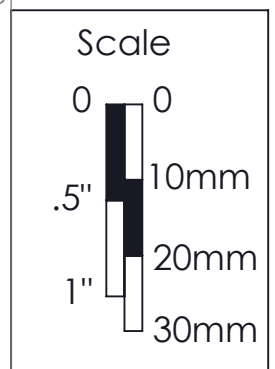

WEIGHT (WITH MOUNTING HARDWARE): 4.6oz [130g]

THIS DRAWING IS THE SOLE PROPERTY OF HIPSHOT PRODUCTS, INC. ALL RIGHTS ARE RESERVED. DIMENSIONS AND PRODUCT FEATURES MAY CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCE: ± .005

REV DATE: 6/10/2020

5D400-708 4 STG D STYLE - 708



TEL: 607-532-9404 FAX: 607-532-9530  
E-MAIL: info@HipshotProducts.com

A

B