

0.552in [14.0mm]
MAX INTONATION

0.708in [18.0mm] (±0.062 in [1.5mm])
(STRING SPACING)

0.292in [7.4mm]
MIN INTONATION

0.630in [16.0mm]
(MAX STRING HEIGHT)

0.400in [10.2mm]
(MIN STRING HEIGHT)

WEIGHT (WITH MOUNTING HARDWARE): 11.2oz [318g]

0.200in [5.1mm]
ADJUST W/
5/16" OPEN WRENCH

0.500in [12.7mm]

ADJUST W/
1/8" HEX WRENCH

0.500in [12.7mm]

STUD

0.800in [20.3mm]

0.080in [2.0mm]

INSERT

1.000in [25.4mm]

USE 7/16in [11mm] BORE

THIS DRAWING IS THE SOLE PROPERTY OF HIPSHOT PRODUCTS, INC. ALL RIGHTS ARE RESERVED. DIMENSIONS AND PRODUCT FEATURES MAY CHANGE WITHOUT NOTICE.


UNLESS OTHERWISE SPECIFIED; DIMENSIONS ARE IN INCHES TOLERANCE: ± .005


REV DATE: 5/31/2020

5D500-708 5 STG D STYLE - 708



8248 STATE ROUTE 96
Interlaken, NY 14847 U.S.A.
TEL: 607-532-9404 FAX: 607-532-9530
E-MAIL: info@HipshotProducts.com



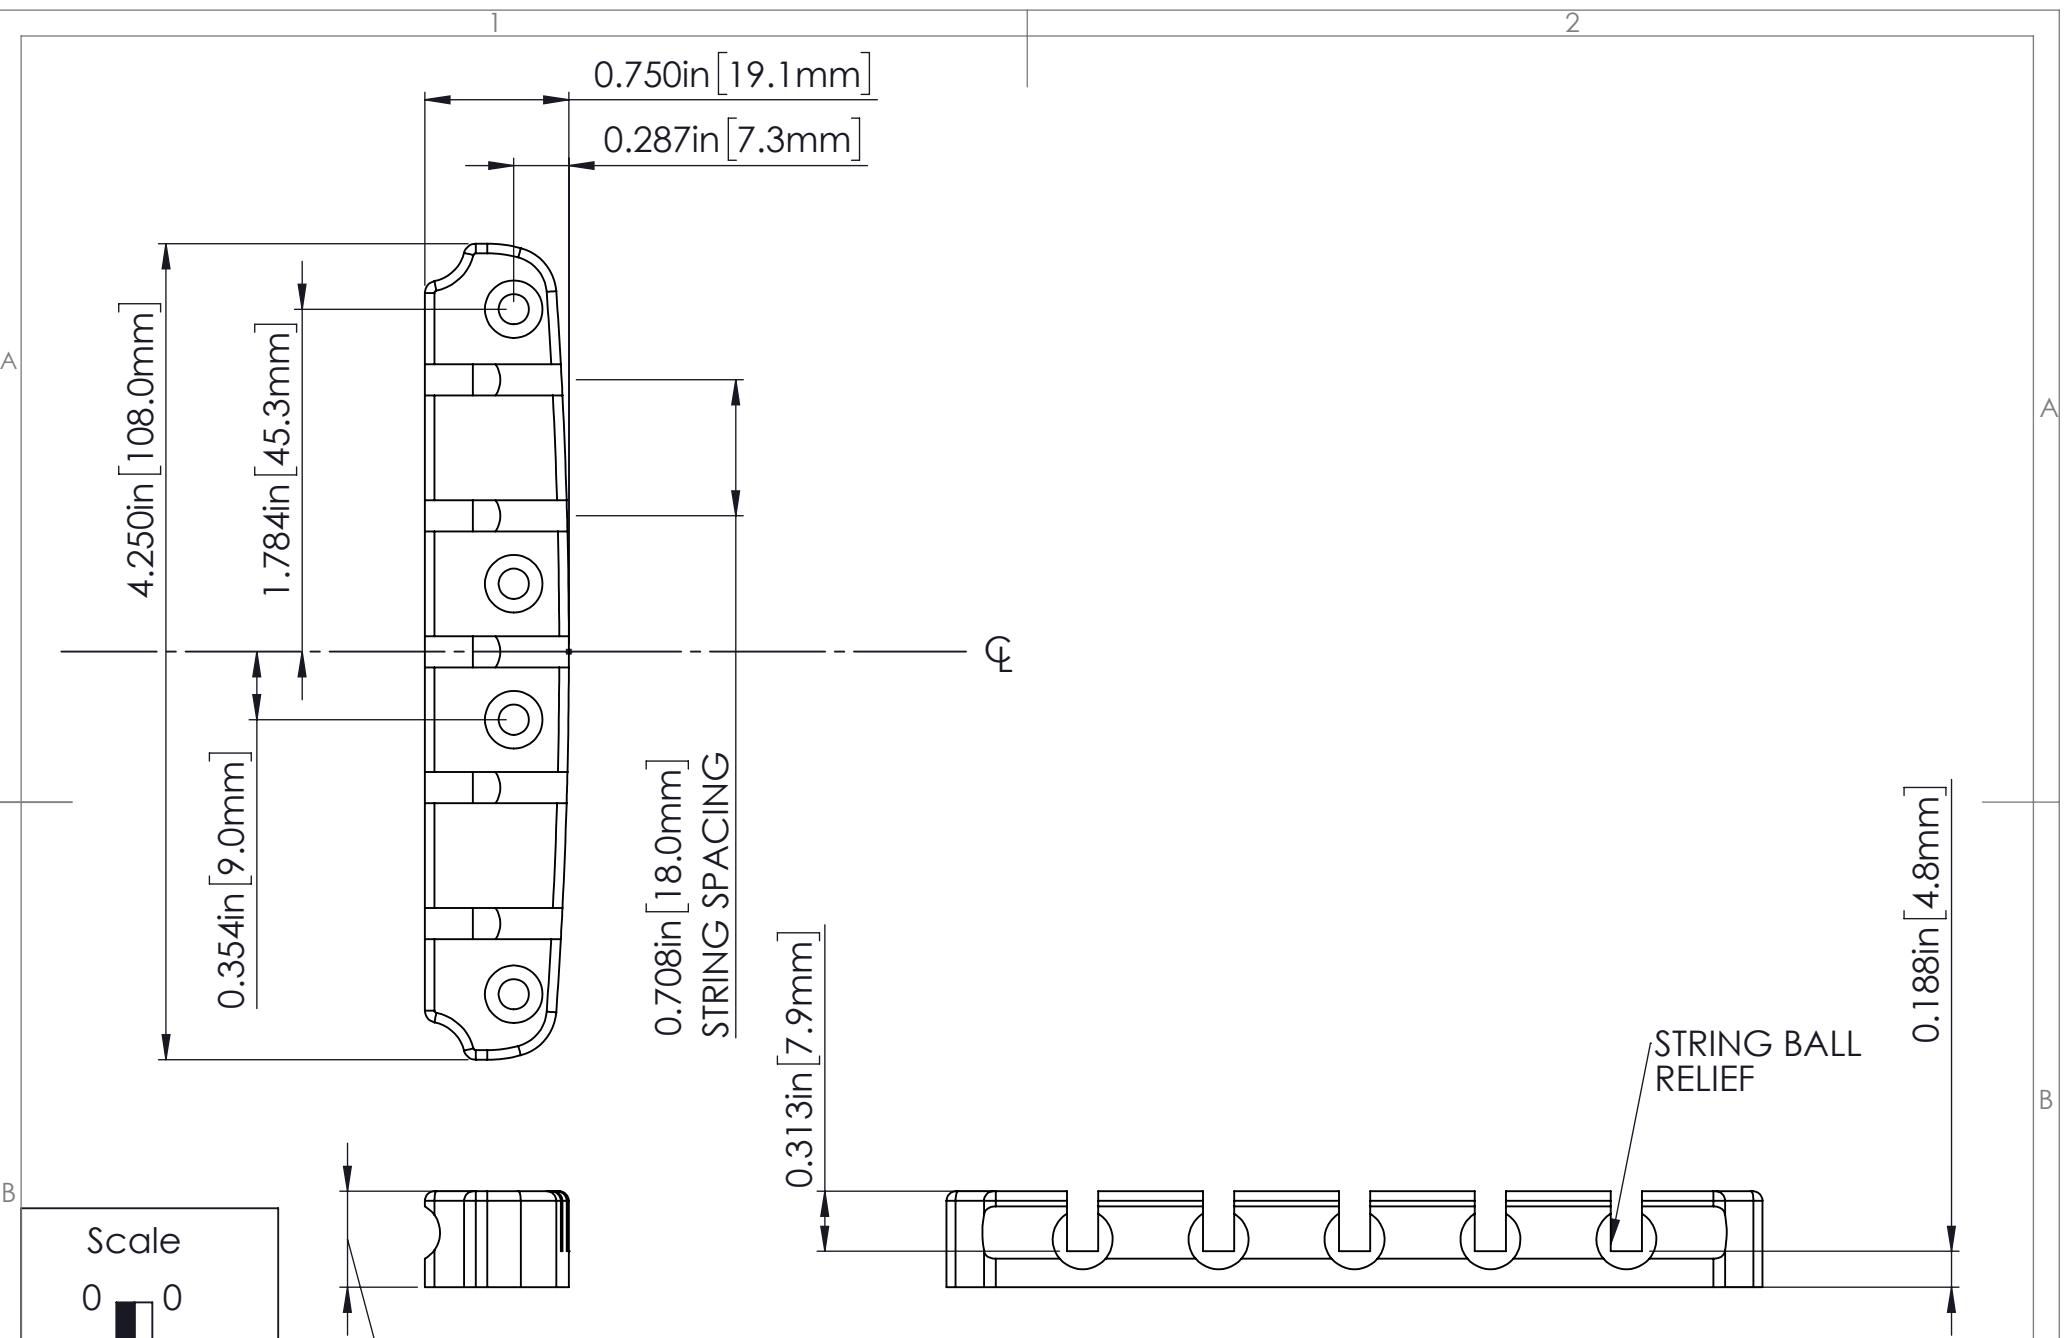

0.750in [19.1mm]
0.287in [7.3mm]

4.250in [108.0mm]
1.784in [45.3mm]

0.354in [9.0mm]

0.708in [18.0mm]
STRING SPACING

0.313in [7.9mm]

0.188in [4.8mm]

0.500in [12.7mm]

WEIGHT (WITH MOUNTING HARDWARE): 5.5oz [156g]

Scale

0 0
.5" 10mm
1" 20mm
30mm

THIS DRAWING IS THE SOLE PROPERTY OF HIPSHOT PRODUCTS, INC. ALL RIGHTS ARE RESERVED. DIMENSIONS AND PRODUCT FEATURES MAY CHANGE WITHOUT NOTICE.
UNLESS OTHERWISE SPECIFIED; DIMENSIONS ARE IN INCHES TOLERANCE: ± .005

REV DATE: 5/31/2020

5D500-708 5 STG D STYLE - 708

8248 STATE ROUTE 96
Interlaken, NY 14847 U.S.A.
TEL: 607-532-9404 FAX: 607-532-9530
E-MAIL: info@hipshotproducts.com